


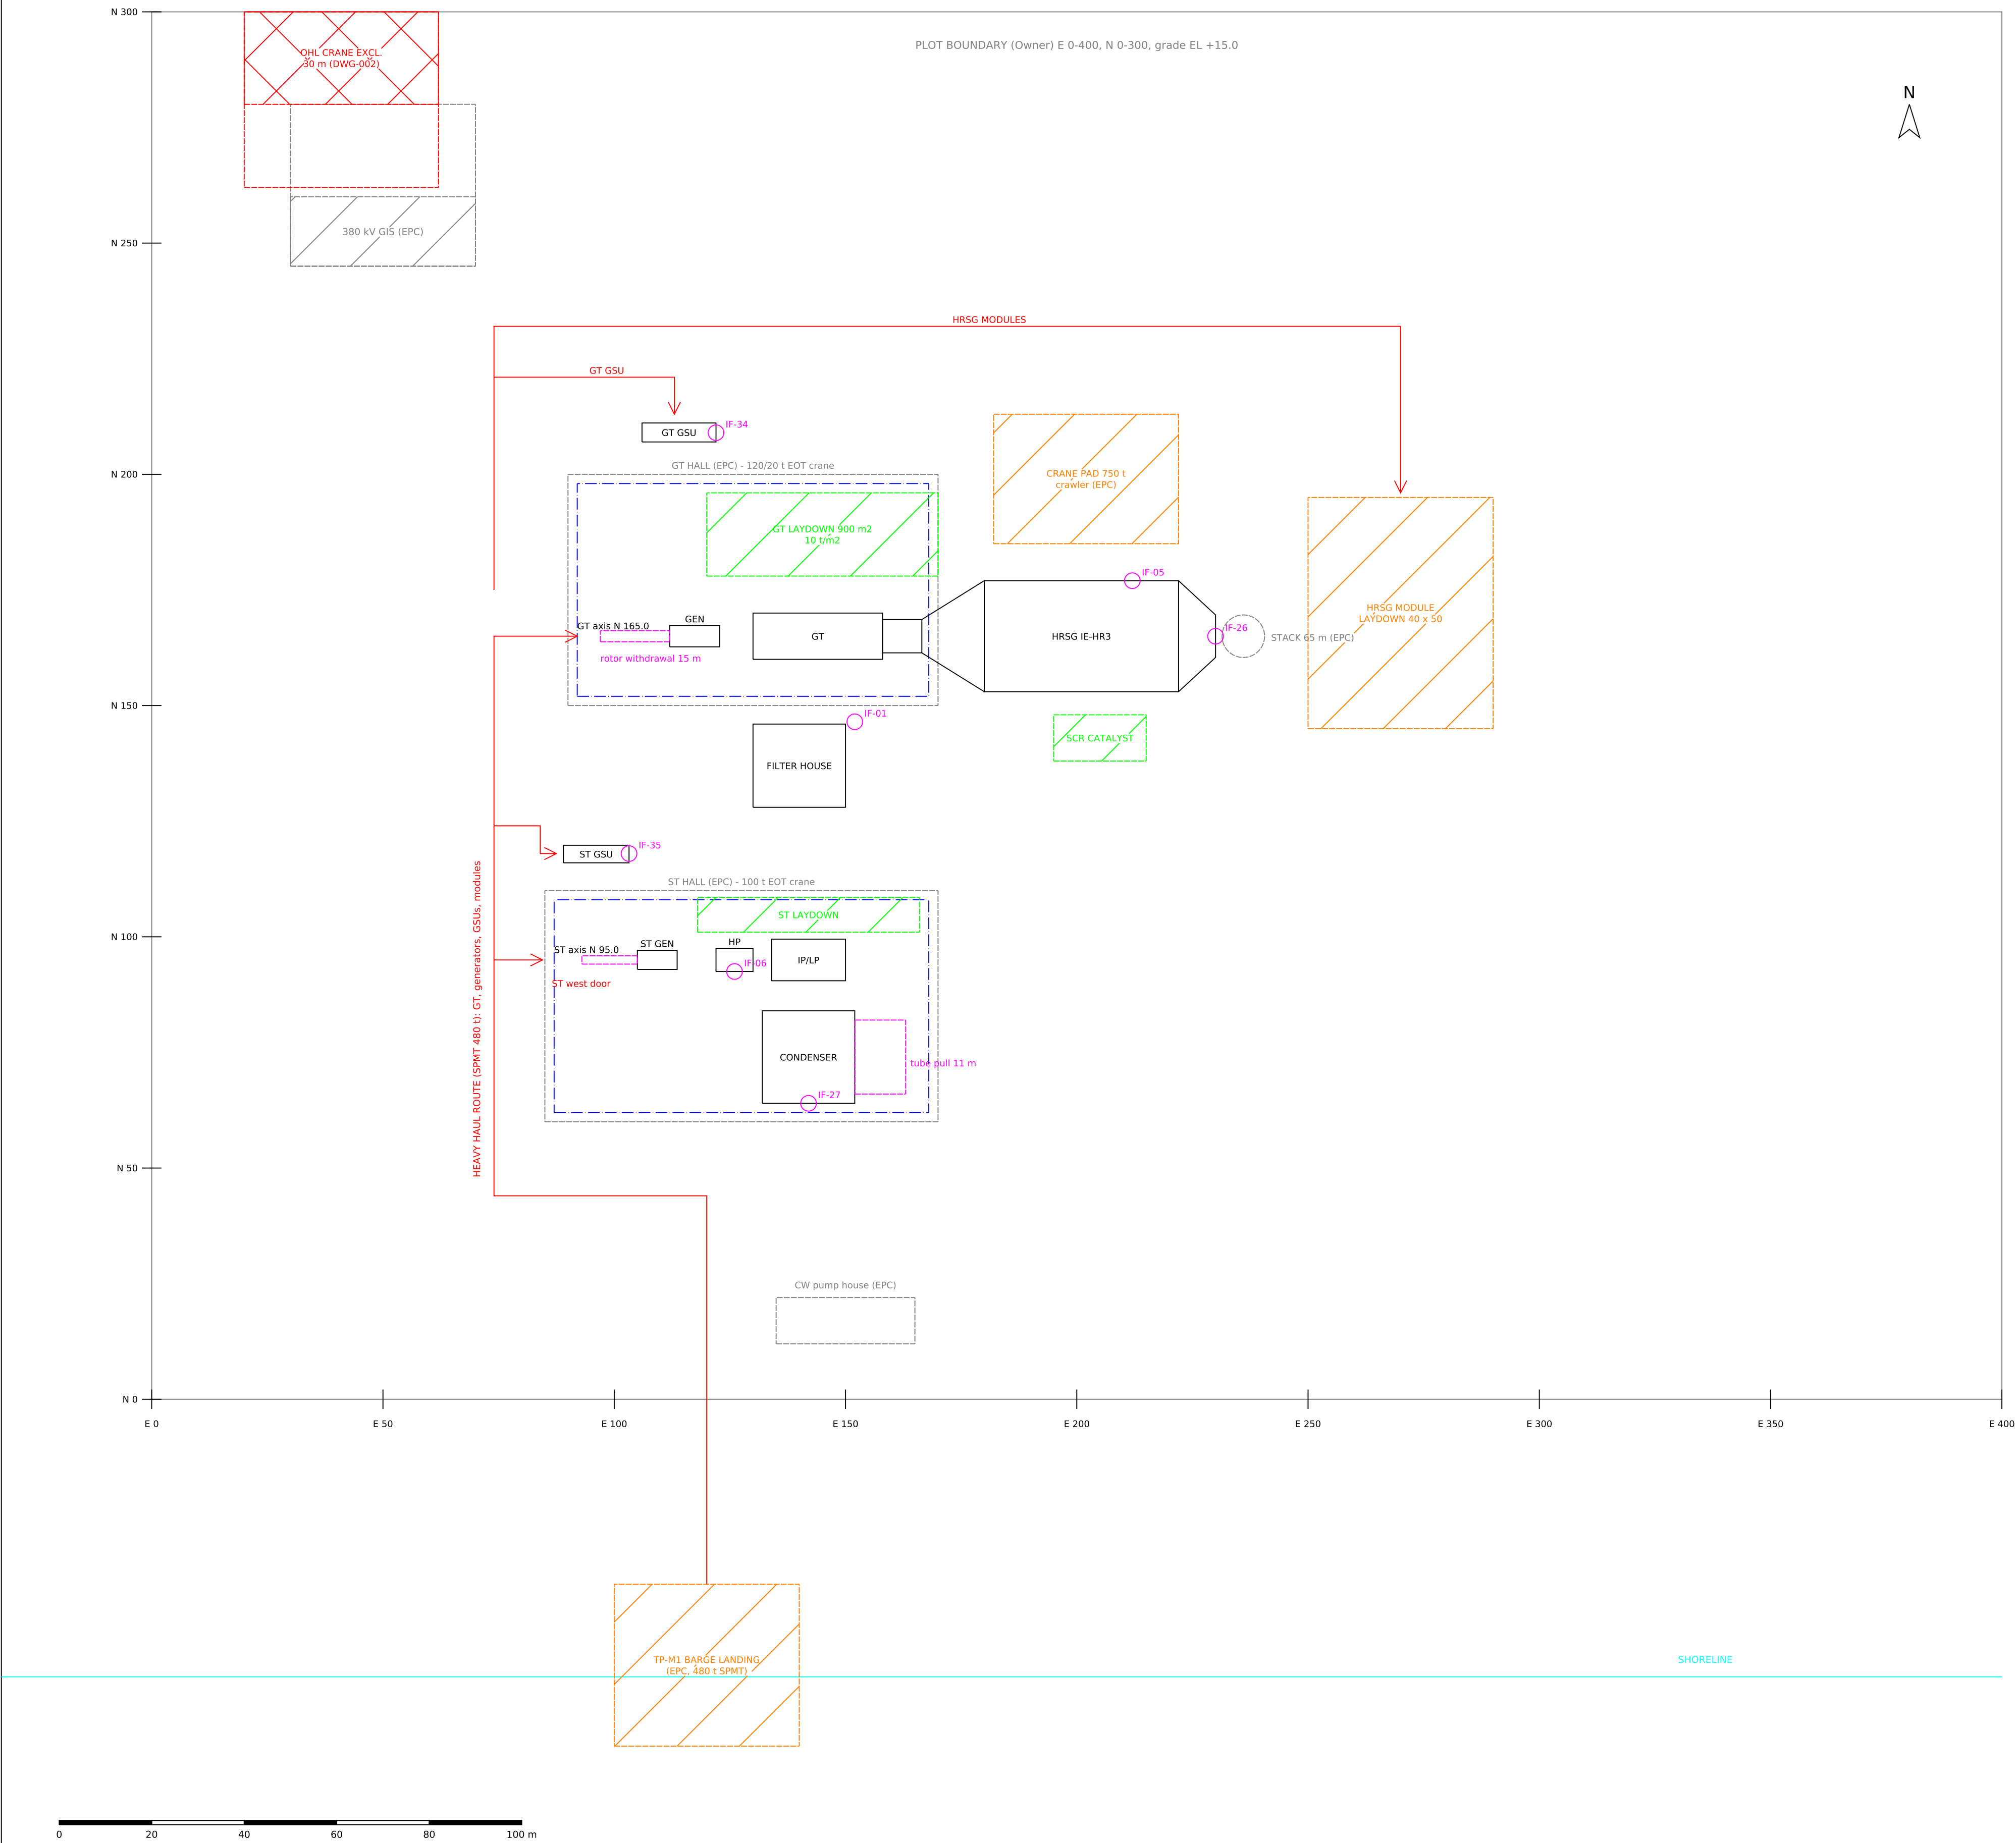

1. HEAVY PIECES AND ROUTES (IEC-ALP-REQ-001 section 10)			
Piece	t	L x W x H m	Route / erection
GT core engine	405	13.2 x 5.9 x 5.6	barge TP-M1, SPMT 480 t gross, skid onto foundation via west door
GT generator stator	340	10.8 x 4.6 x 4.9	barge, SPMT, jacking / skidding (no crane)
GT GSU	268	11.2 x 4.1 x 4.6	barge, SPMT, skid into bay
HRSG HP evaporator module	185	24.0 x 3.6 x 26.5	barge, SPMT, 750 t crawler (EPC) from pad
ST generator stator	185	8.6 x 4.1 x 4.2	barge, SPMT, jacking / skidding
ST GSU	168	9.4 x 3.8 x 4.3	barge, SPMT, skid into bay
Exhaust diffuser (2 pieces)	2 x 62	8.5 x 7.2 x 7.0	road, GT hall crane 120 t
HRSG HP drum	96	14.0 x D 1.9	road (< 120 t), crawler crane
Condenser modules	4 x 95	per DS-105	road, ST hall crane 100 t / jacking

2. INSTALLATION AND MAINTENANCE REQUIREMENTS	
Requirement	IEC requirement to the EPC (EPC to provide)
Heavy-haul route	SPMT 480 t gross from TP-M1 to the GT and ST foundations and the GSU bays; 10 m clear width, 25 m inside turning radius, ground bearing >= 150 kN/m ² (verify); no overhead lines below 7 m.
GT hall crane	EOT 120 t main / 20 t auxiliary hook, hook covers GT, generator and laydown (GA-101).
ST hall crane	EOT 100 t, hook covers ST, generator and laydown (GA-102).
Laydown	GT major inspection 900 m ² at 10 t/m ² in the GT hall; ST laydown 360 m ² ; HRSG module laydown 40 x 50 m.
Withdrawal spaces	GT generator rotor 15 m and ST generator rotor 12 m to the west; condenser tube pull 11 m to the east (inside the ST hall) - keep free of permanent equipment, cable trays and pipes.
HRSG erection	crane pad 40 x 28 m north of the HRSG for a 750 t crawler (EPC), 250 kN/m ² ; module lift radius <= 42 m.
Transformers	GSU bays with oil pits (110 %), fire walls where < 15 m to buildings or each other (GA-104).
Fire exclusion	OHL crane exclusion 30 m (ALP-OWN-DWG-002) applies to GIS erection near TP-E1.

- LEGEND**
- IEC supply (equipment outline)
 - EPC item, shown as IEC space requirement
 - maintenance / withdrawal space (keep free)
 - laydown area
 - crane hook coverage / crane
 - crane pad / pre-assembly area (temporary)
 - vehicle / heavy-haul access (SPMT)
 - dimension (m)
- NOTES**
- IEC shows its equipment and the spaces it needs; buildings, roads, pads, fire walls, stack, GIS and all foundations are EPC scope and are shown indicatively (IEC plot plan governs).
 - Details: GA-101 GT and generator, GA-102 ST, generator and condenser, GA-103 HRSG, GA-104 GSU.
 - Terminal points per IEC-ALP-IF-001 Rev A; positions indicative until the EPC piping layout.
 - Weights: IEC-ALP-DS-101...106 and IEC-ALP-REQ-001 sections 9-11.

VENDOR	Imaginary Electric Company - Power Generation Division (fictional)
PROJECT	Alpilla 600 MW CCGT - 1 x IE-9H.02 multi-shaft power island
CLIENT	Istanbul EPC (consortium leader) - EPC engineering
TITLE	POWER ISLAND ARRANGEMENT - INSTALLATION AND MAINTENANCE SPACES
DWG NO / REV	IEC-ALP-GA-100 Rev 0
SCALE / SHEET	1:750 on A1 / 1 of 1
COORDINATES	plant grid m; levels EL m (grade EL +15.0)
DATE / STATUS	2026-09-28 issued for EPC layout (reference)
NOTE	CASE STUDY - fictional; IEC proprietary