



PLAN (grid E/N m)

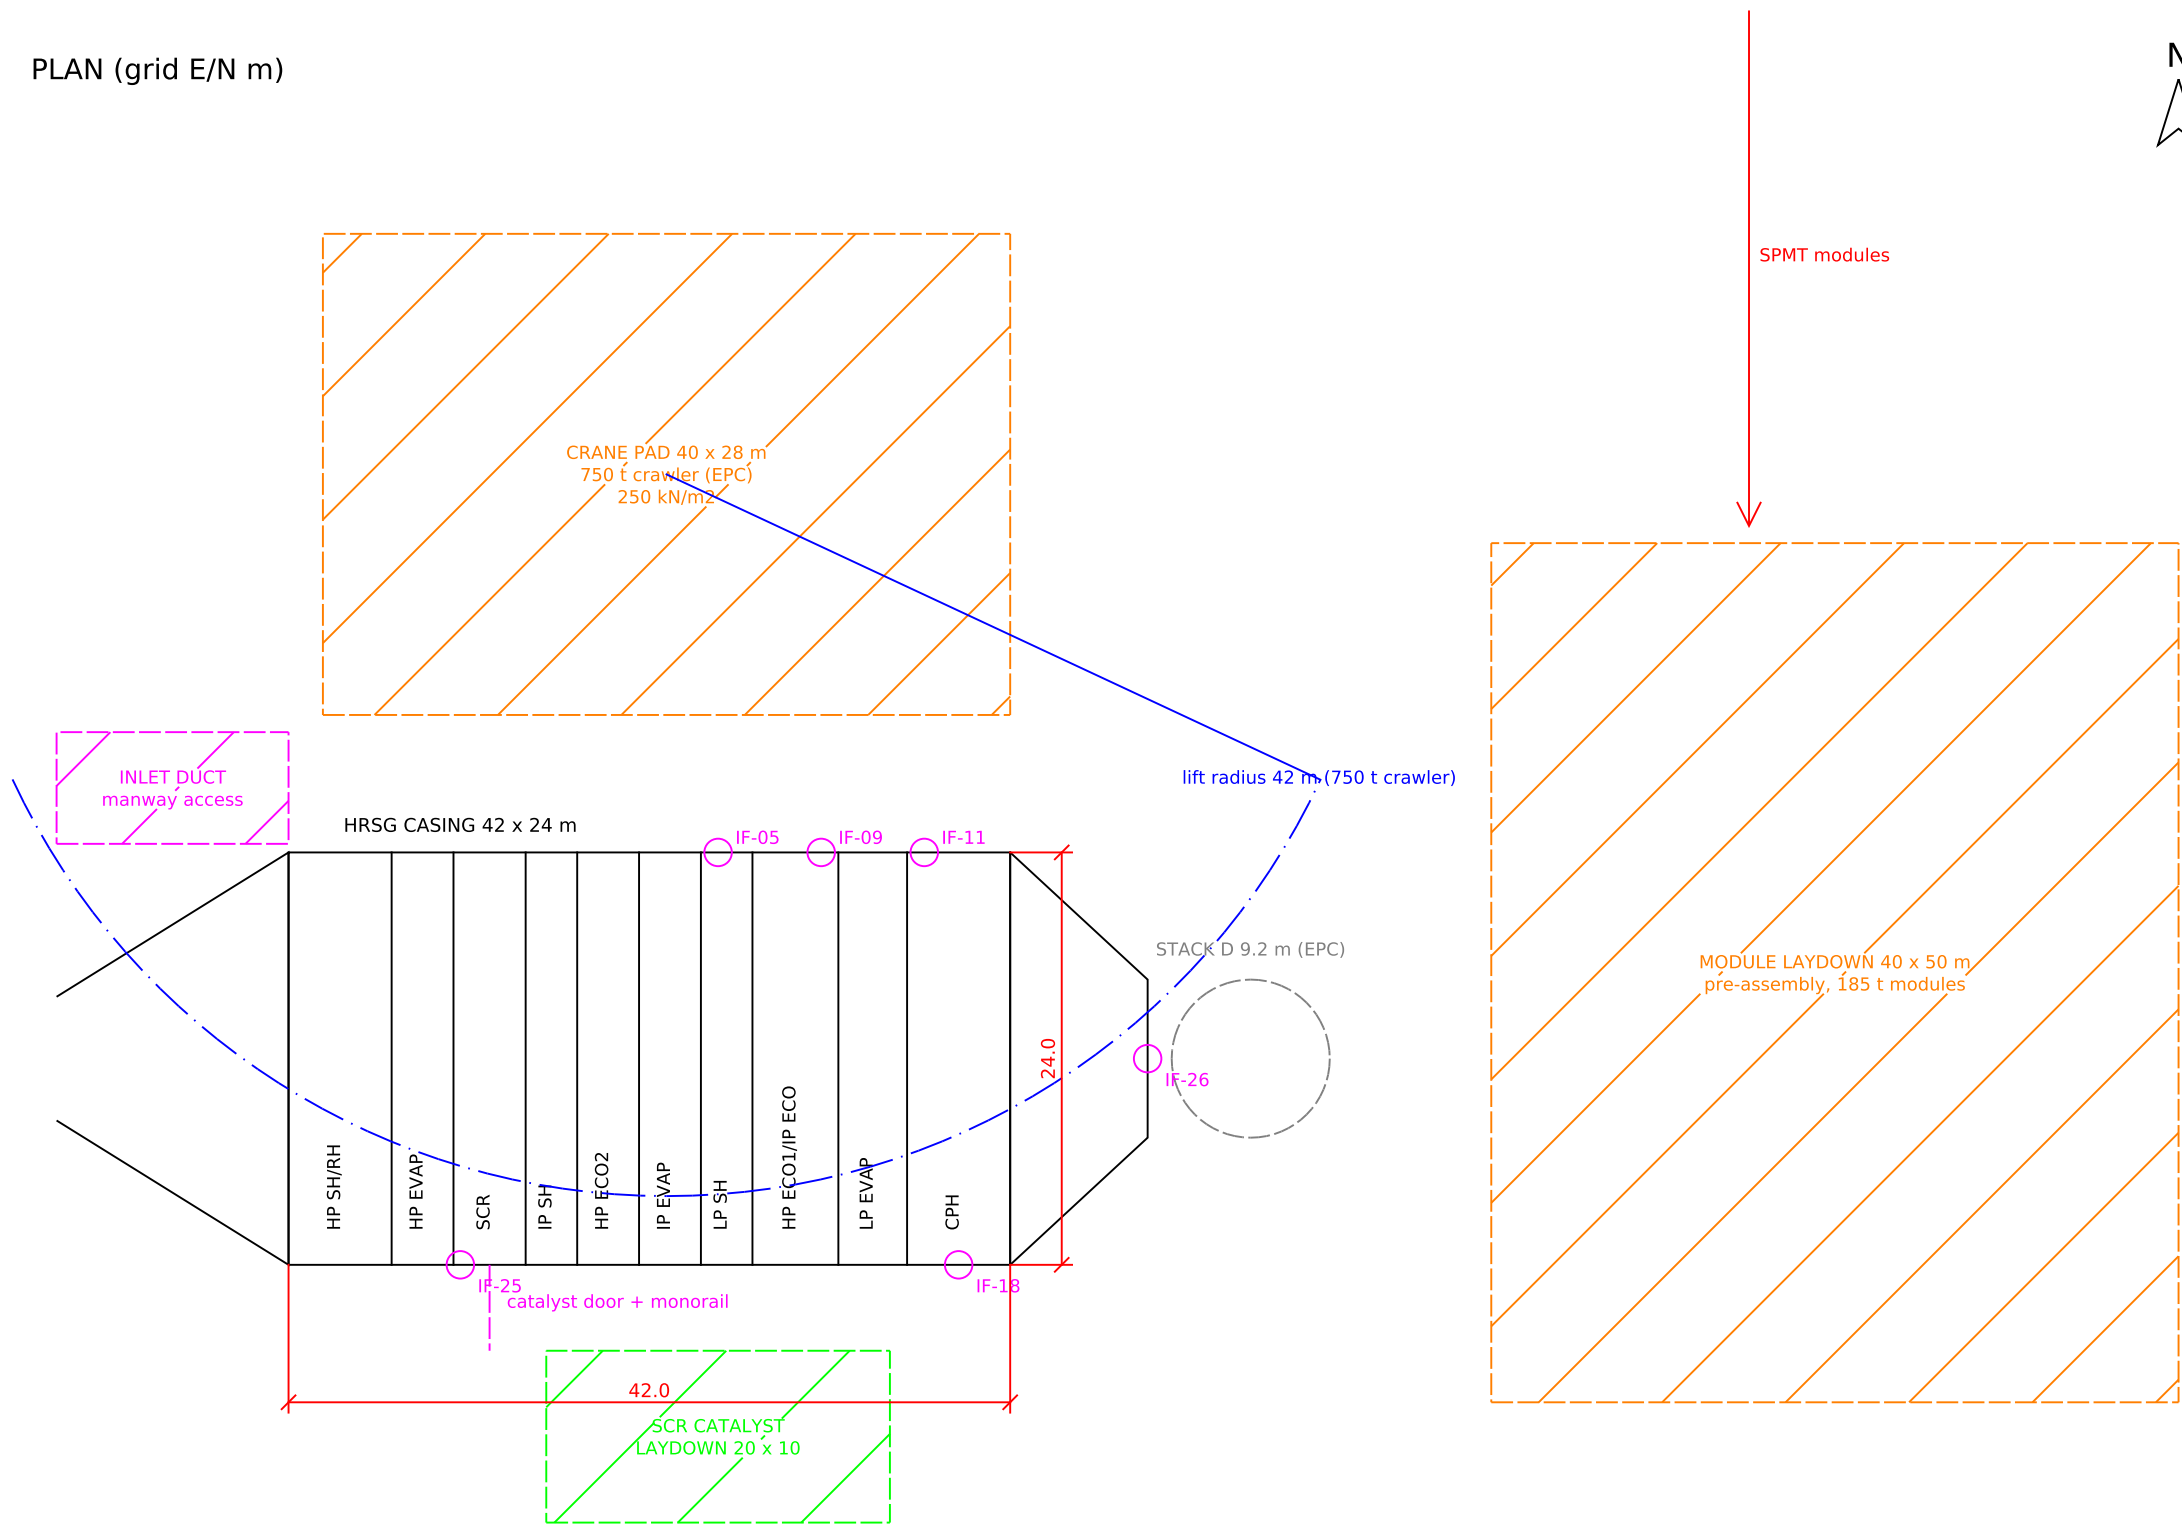

ELEVATION (looking north), EL m

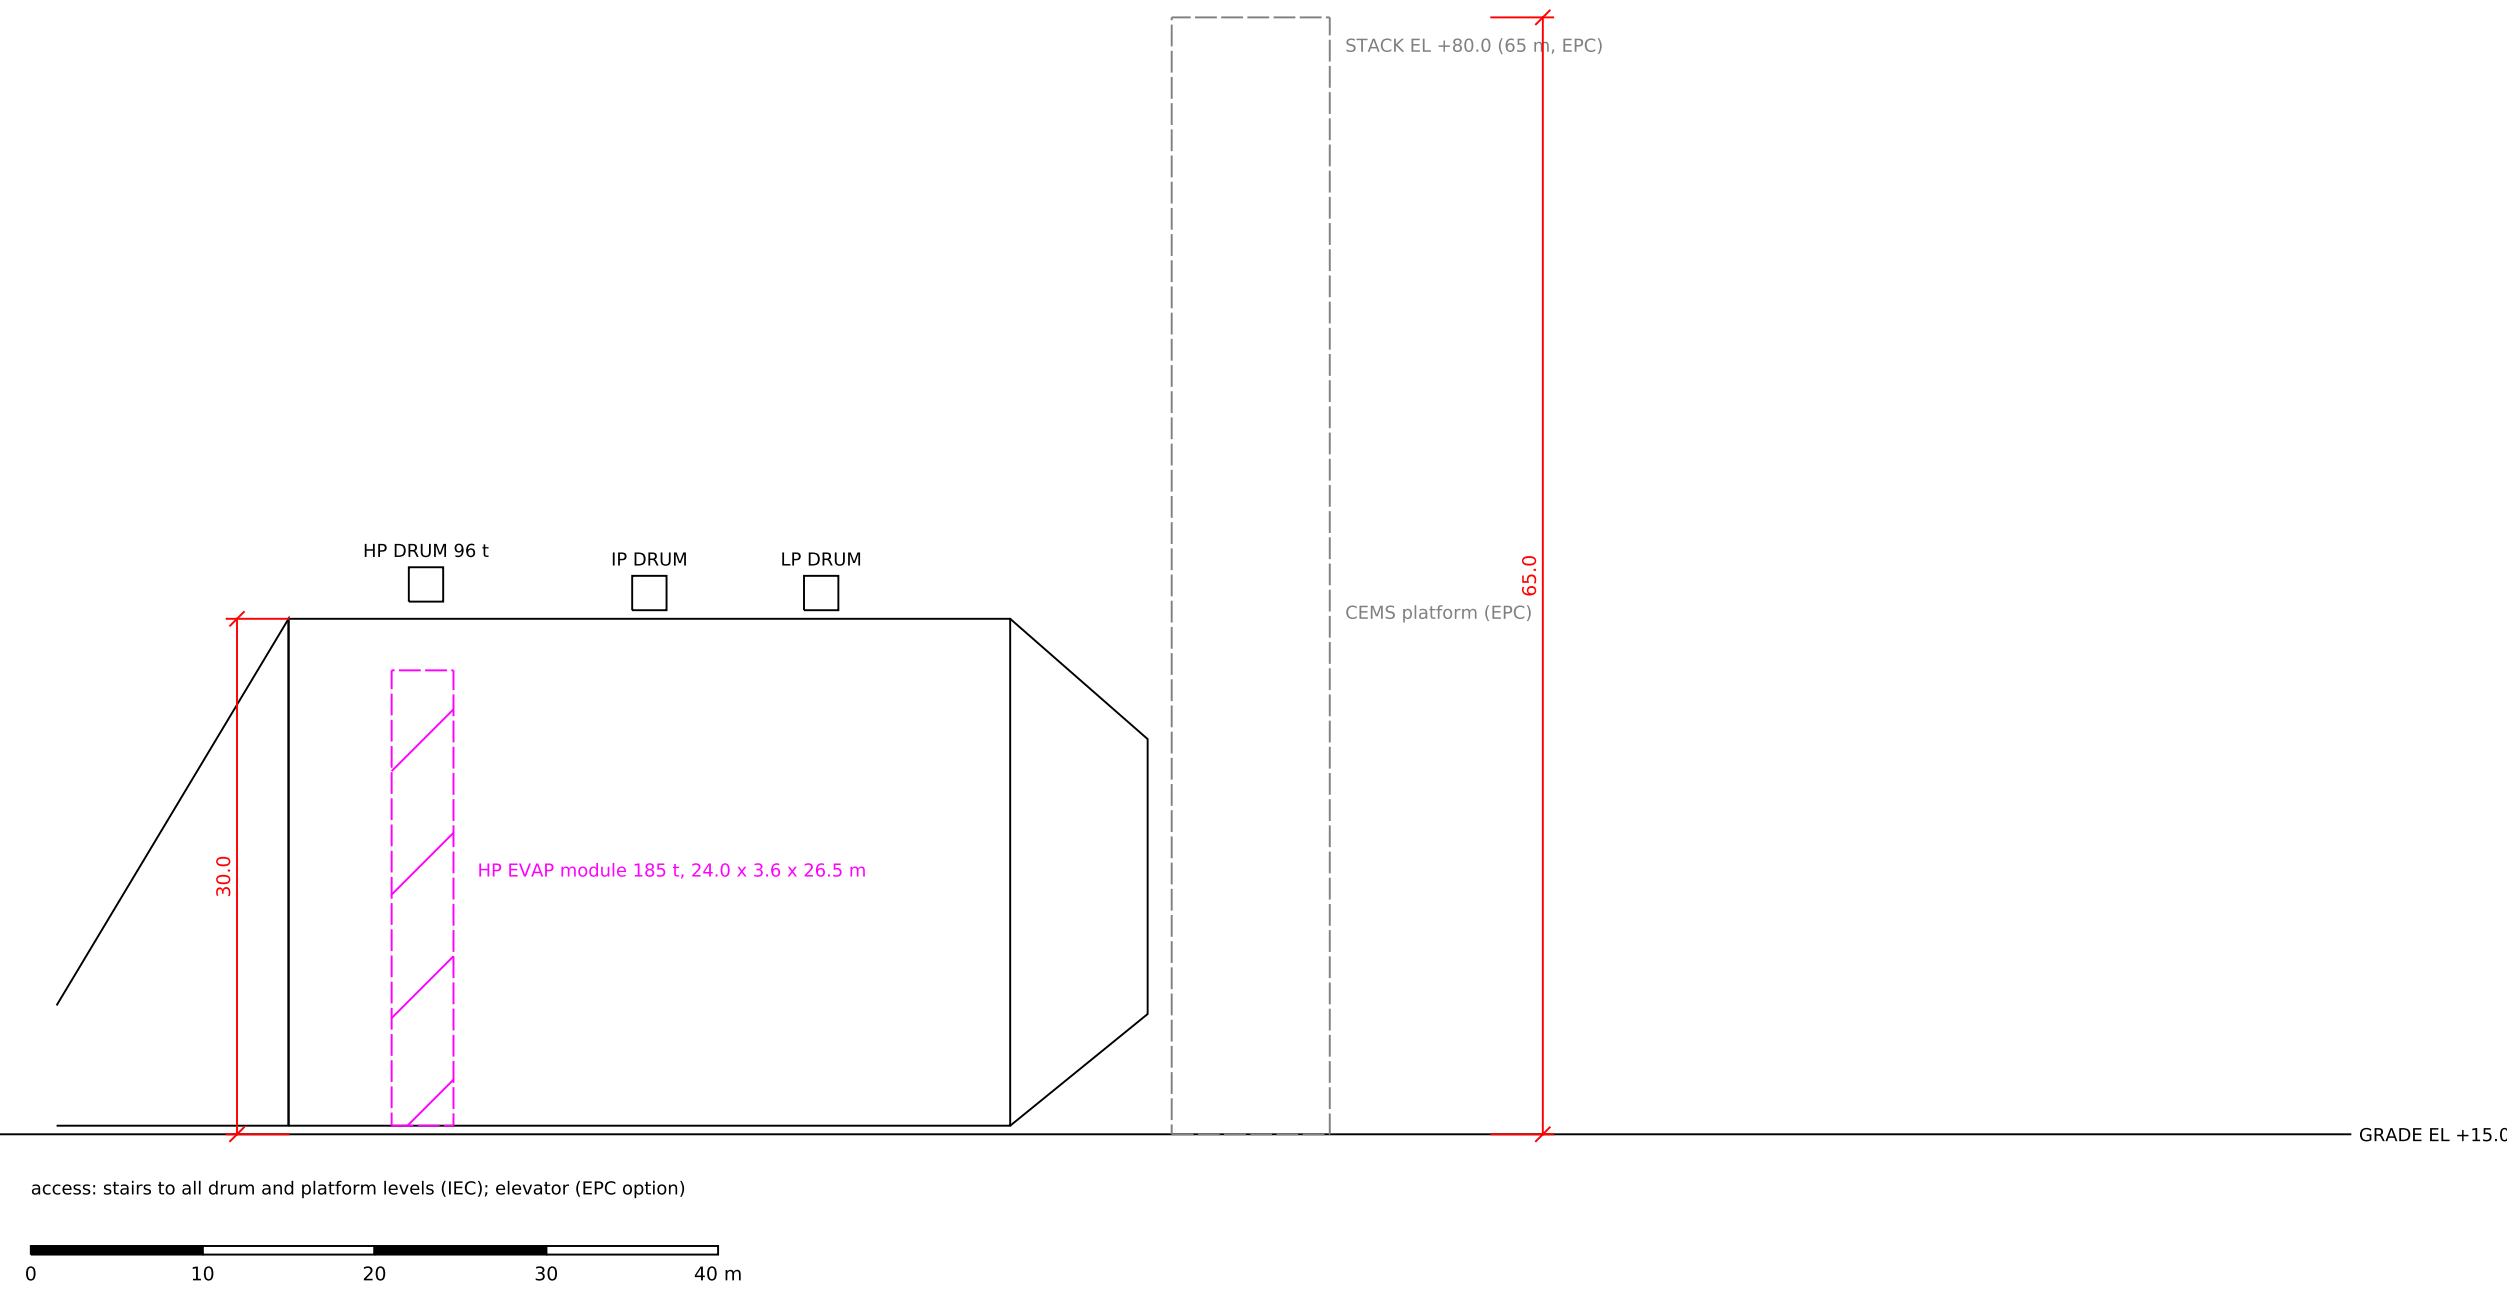

1. WEIGHTS AND LIFTS

Item	t	Remark
Heaviest module (HP evaporator)	185	24.0 x 3.6 x 26.5 m shipped horizontal; upended on the pad
HP drum	96	14.0 m, OD 1.9 m; lifted onto the drum supports
Total HRSG (pressure parts, casing, steel, catalyst)	6,400	D5-104; operating 7,800 t on the base plates
SCR catalyst modules	<= 1.5	replacement every 4-5 years through the side door with monorail

2. ERECTION AND MAINTENANCE REQUIREMENTS

Requirement	IEC requirement (EPC to provide)
Erection crane	750 t crawler with superlift on the crane pad north of the HRSG; module lift radius <= 42 m; pad 40 x 28 m, 250 kN/m ² (EPC to verify with the geotechnical data).
Module laydown	40 x 50 m east of the stack for upending and pre-assembly; SPMT access from the north road.
Catalyst	20 x 10 m laydown at the south side below the catalyst door; 5 t monorail at the catalyst section.
Inspection access	inlet duct manway, access doors per section, 2.5 m clear at all doors and headers.
Stack interface	IF-26 outlet flange; fabric expansion joint by EPC; stack 65 m (TQ-029 pending on SC-011).

LEGEND

- IEC supply (equipment outline)
- EPC item, shown as IEC space requirement
- maintenance / withdrawal space (keep free)
- laydown area
- crane hook coverage / crane
- crane pad / pre-assembly area (temporary)
- vehicle / heavy-haul access (SPMT)
- dimension (m)

VENDOR	Imaginary Electric Company - Power Generation Division (fictional)
PROJECT	Alpilla 600 MW CCGT - 1 x IE-9H.02 multi-shaft power island
CLIENT	Istanbul EPC (consortium leader) - EPC engineering
TITLE	HRSG IE-HR3 - GA, ERECTION AND MAINTENANCE
DWG NO / REV	IEC-ALP-GA-103 Rev 0
SCALE / SHEET	1:400 on A1 / 1 of 1
COORDINATES	plant grid m; levels EL m (grade EL +15.0)
DATE / STATUS	2026-09-28 issued for EPC layout (reference)
NOTE	CASE STUDY - fictional; IEC proprietary